



# M8800 Narrow Stile Exit Device



## SPECIFICATIONS:


- **Specification:** Conforms to ANSI BHMA A156.3 Grade 1 Exit Device Requirement Standard  
ANSI/UL305 Standard for Safety for Panic Hardware  
2013 California Building Code Sec. 11B-309.4
- **For Doors:** *(Please specify when ordering non standard size doors)*  
Thickness: Standard 1 3/4", may fit with door thickness up to 2"  
Width: Standard 36" or 48", may fit door width 30"-48"
- **Mounting:** Furnished Standard with Wood and Machine Screws
- **Head Cover:** Zinc Alloy
- **Chassis:** Aluminum
- **Rail Assembly:** Heavy Gauge extruded aluminum with stainless steel on top of touch bar
- **End Cap:** Zinc Alloy
- **Hand:** Non-handed
- **Latch Bolt:** Stainless Steel, 3/4" (18mm) throw
- **Strike:** Roller Strike (Stainless Steel)
- **Dogging:** Allen Key (equipped on panic rate devices only)
- **Finish:** 32D: Satin Stainless Steel Finish  
10B: Oil Rubbed Bronze Finish
- **Dimension:** Touch bar height from finished floor: 41" (1041mm) from center of touch bar  
Touch Bar Projection: Neutral: 3 5/16" (84mm)  
Depressed: 2 19/32" (66mm)  
Head Cover: LxWxH: 206mm x 76mm x 71mm  
Device Length: 34 5/8" (88cm) for 36" door width 46 5/8" (118.5 cm) for 48" door width

MARKS #	FUNCTION
M8800	Rim Panic
M8800 - 48	Rim Panic - 48"





# M9900 VR Exit Device

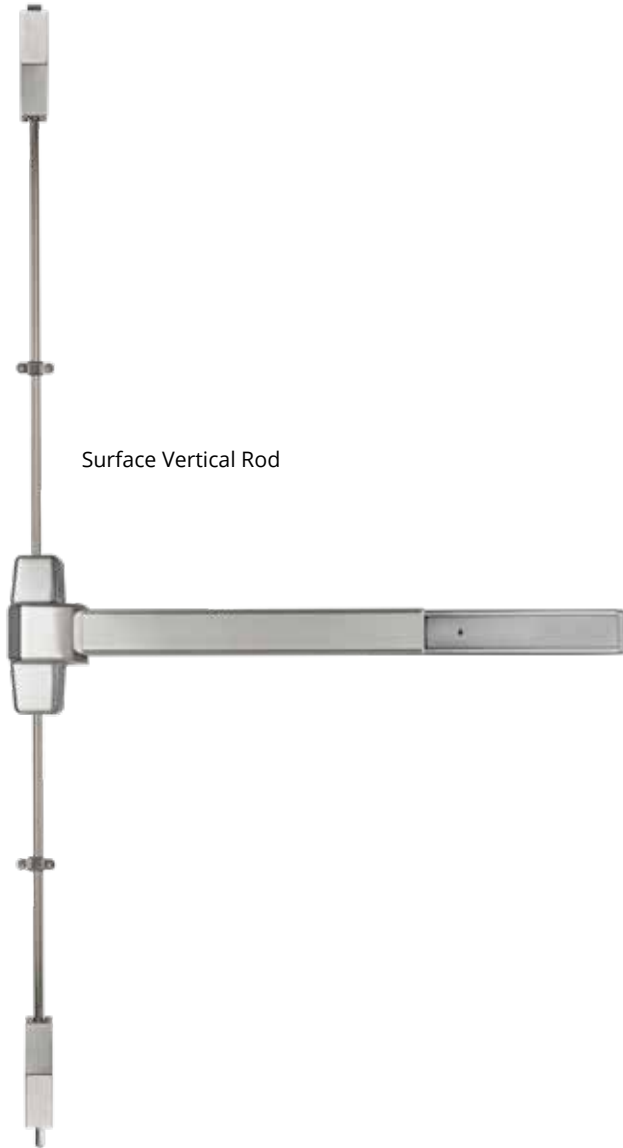

## SPECIFICATIONS:

- **Device Head Cover:** Zinc alloy or stainless steel
- **Chassis:** Steel, plated
- **Mechanism Housing:** Extruded aluminum
- **Push Bar Base:** Extruded aluminum
- **Touch Plate:** Stainless Steel
- **End Cap:** Stainless Steel
- **Top Latch:** Stainless Steel 37/64" (14.8mm)
- **Top Strike:** Included
- **Bottom Latch:** Stainless Steel 37/64" (14.8mm)
- **Bottom Strike:** Included
- **Latch Case Covers:** Steel, stainless steel or brass
- **Vertical Rods:** Aluminum tube
- **Hand:** Non-handed
- **Mounting:** Machine screws standard. Sex bolts optional. Order "SNB" for wood or unreinforced metal doors
- **Dogging:** Allen-type key furnished
- **Finish:** 32D
- **Outside Trim:** Order separately
- **Standard Height:** 7' doors
- **UL listed:** ANSI/BHMA Grade 1 Panic Exit Hardware
- **3-Hour Fire Rated**

## APPLICATION:

- For use on single door or pair of doors
- 1 3/4" (44 mm) door thickness standard. Specify thickness other than 1 3/4"
- RHR or LHR hollow metal, wood and mineral core doors
- Minimum Stile Width: 3 1/2" (89 mm)

Distributed by:



# MARKSUSA



365 Bayview Avenue, Amityville, NY 11701 • 1-800-645-9445 • info@marksusa.com • www.marksusa.com